


Vertical Indicator Post (IP), UL Listed

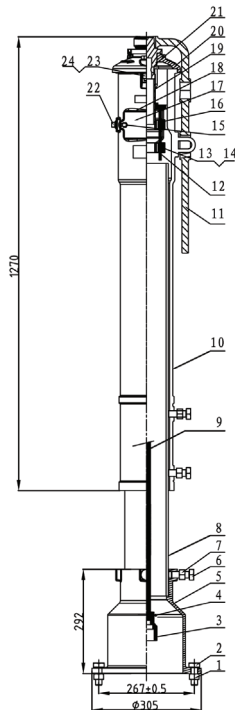

IP

MATERIAL SPECIFICATION

Part No.	Part	Standard Specification
1	Hex Nut	Carbon Steel Zinc Plated
2	Hex Bolt	Carbon Steel Zinc Plated
3	Socket	ASTM A536, 65-45-12
4	Cotter Pin	AISI 304
5	Base Flange	Cast Iron ASTM A126 Class B
6	Hex Bolt	Carbon Steel Zinc Plated
7	Hex Nut	Carbon Steel Zinc Plated
8	Standpipe	Carbon Steel ASTM A53
9	Stem 1" Square	Carbon Steel AISI 1045
10	Body	Cast Iron ASTM A126 Class B
11	Locking Wrench	ASTM A536, 65-45-12
12	Target Carrier Nut	AISI 304
13	Hex Bolt	Carbon Steel Zinc Plated
14	Hex Nut	Carbon Steel Zinc Plated
15	Hex Bolt	Carbon Steel Zinc Plated
16	Target	Cast Aluminum
17	Window Class	Plexiglass
18	Gasket	PTFE
19	Operating Nut	AISI 304
20	Top Section	Cast Iron ASTM A126 Class B
21	Snap Ring	AISI 1066
22	Plug	Malleable Iron
23	Square Nut	Carbon Steel Zinc Plated
24	Hex Bolt	Carbon Steel Zinc Plated

Field Adjustment:

- 1.Remove the Top Section from the top of the Indicator Post assembly;
- 2.Cut the required stem length and adjust the Standpipe to match up to the ground line;
- 3.Set the "OPEN" and "SHUT" targets for the appropriate valve size;
- 4.Reattach the Top Section to the top of the Indicator Post assembly.

- **Statement:**
Vertical indicator post provides a means to operate a buried or otherwise inaccessible valve and able to indicate the open or shut position of the valve.
- **Coating:**
Fusion Bonded Epoxy Coating in accordance with ANSI/AWWA C550